

# TOSHIBA

Leading Innovation >>>

TDP-T360  
T420  
TW420



## Let Colour & Clarity bring you to new heights

The TDP-T360 TDP-T420 & TDP-TW420 are Toshiba's DLP™ projectors that offer an industry-leading 4,000 ANSI lumens brightness level and Toshiba's Natural Color Enhancer color correction circuitry that can present impressive and stunning visuals in a variety of business situations, especially large meeting rooms and lecture halls.




3500 / 4000 ANSI Lumens • High Contrast Ratio 2,000:1 • XGA



# TDP-T360 / T420 / TW420

## Projection distances and size

Model			Projection Distance	
	Description	Projection Size (Inches)	Min. Length (Zooming Max)	Min. Length (Zooming Min)
TDP-T360 TDP-T420 TDP-TW420	A	40	1.29m	1.56m
	B	60	1.96m	2.36m
	C	80	2.63m	3.17m
	D	100	3.30m	3.97m
	E	150	4.98m	5.98m
	F	200	6.65m	7.99m
	G	250	8.33m	10.00m
	H	300	10.00m	12.01m

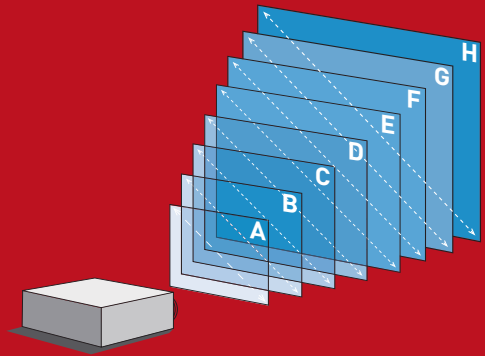

## Specifications

Model		TDP-T360	TDP-T420	TDP-TW420
Display Technology	Panel Size	0.7" DMD™ Chip		
	Aspect Ratio	16:9 Switchable To 4:3		
Resolution		1,024 x 768 (XGA)		
Brightness		3,500 ANSI Lumens	4,000 ANSI Lumens	4,000 ANSI Lumens
Color Reproduction (Common Trait)		16.7 Million Colors	16.7 Million Colors	16.7 Million Colors
Contrast Ratio		2,000:1		
Projection Lens		F= 2.3-2.47 / f= 22.97-27.56, Manual Focus and Zoom		
Light Source (Standard/Low)		275W/220W		
Compatible Scanning Frequency (Horizontal/Vertical)		15-120kHz / 50 - 150Hz		
Projection		Front, Rear and Ceiling		
Keystone Correction		Auto V (+/- 40 degrees)		
Wireless Technology		-	-	Wireless LAN (IEEE 802.11g/b) WEP 64/128 bit, WPA, WPA2 encoding
Picture Color Enhancer		NCE4™		
Projection Screen Size (Diagonal)		40-300"		
Projection Distance for 100" screen		3.3m-100 inch (wide)		
Throw Ratio		1.62-1.95:1		
Input Signal Format	Video Signal	NTSC, PAL, SECAM		
	Color Difference Signal	480p/480i/576i/576p/720p/1080i/1080p		
	Digital RGB	VGA, SVGA, XGA(True), SXGA, WXGA & UXGA (compressed)		
Input Terminal		1 x RGB (D-sub 15), 1 x DVI-I (HDCP), Component (Y/Cb/Cr) via RGB, S-video, Composite video (1 x RCA), RGB audio (2 x stereo mini jack), Video / S-video audio (1 x RCA L/R)		
Other Terminal	RJ45	-	-	Yes
	USB (Type A)	-	-	Yes
Output Terminal		RGB (D-sub 15), Audio (Stereo Mini Jack)		
Serial Interface		RS-232C (D-sub 9pin)		
Power Source		AC 100 - 240V, 50/60Hz		
Power Consumption		385W		
Replacement Lamp		TLP-LW23		
Internal Speaker		1W (Mono)		
Dimensions (WxHxD)		338 x 128 x 280mm		
Weight		4.2kg	4.2kg	4.2kg
Noise Level (Normal / Eco mode)		33dB / 29dB		
Special Features		Password, Panel Lock, User Logo, DDC Compatible, Black Board Function, Instant Shutdown, Auto setup, Auto keystone correction, NCE 4™, Instant shut down, Buzzer, User logo capture, Password, Black board-function, Panel lock, Digital zoom, DDC compatible		
Features		-	-	Yes
Accessories		Remote Control with Laserpointer And Batteries, User's manual, Power Code, D-sub cable		

Product design and specifications are subject to change without notice.

Distributed by:

# TOSHIBA

**TOSHIBA SINGAPORE PTE., LTD.**

Distributor and Trader Department - Consumer Electronics Division  
438B Alexandra Road #06-01, Alexandra Technopark Singapore 119968  
Tel (65) 6275 0660 Fax: (65) 6275 5053  
<http://projectors.toshiba.com.sg>